

Product Process Qualification

Handbook for Suppliers

1 Table of Contents

2 Abbreviations.....2

3 Scope2

4 Purpose.....2

5 What is PPQ?.....3

6 When to perform PPQ?4

7 PPQ Elements.....5

 7.1 Element 1: Product Release 5

 7.2 Element 2: Supplier Drawings and Specifications 6

 7.3 Element 3: Critical to Quality (CTQ) Characteristics..... 6

 7.4 Element 4: Manufacturing Quality Control Plan (MQCP)..... 8

 7.5 Element 5: Inspection Records and Data Sheets..... 9

 7.6 Element 6: Material Data 9

 7.7 Element 7: Destructive & Non-Destructive Testing Records 10

 7.8 Element 8: Metals Joining Documents..... 11

 7.9 Element 9: Failure Modes & Effects Analysis (FMEA) 11

 7.10 Element 10: Process Capability 12

 7.11 Element 11: Gage Repeatability & Reproducibility (Gage R&R) 13

 7.12 Element 12: Tooling & Gages 14

 7.13 Element 13: Discrepancy Reports and Engineering Changes 15

 7.14 Element 14: Packaging Instructions and Photos 16

 7.15 Element 15: Special Process Documentation..... 16

 7.16 Element 16: Correspondence and Miscellaneous Documents 16

 7.17 Element 17: Personnel & Suppliers..... 17

 7.18 Element 18: First Article Inspection (FAI)..... 18

 7.19 Element C#: Custom Elements 18

2 Abbreviations

CofCs	Certificate of Conformity
cpk	Machine Capability
CTQ	Critical to Quality
FAI	First Article Inspection
FDR	Fault Discovery Report
FMEA	Failure Mode and Effects Analysis
FR	Failure Rate
MDR	Material Disposition Reports
MQCP	Manufacturing Quality Control Plan
NCC	Non-Conformance Costs
NCR	Non-Conformance Report
NDE	Non-Destructive Evaluation
NDT	Non-Destructive Testing
PDS	Product Disclosure Statement
PPQ	Product Process Qualification
RPN	Risk Priority Number
SCAR	Supplier Corrective Action Report/Request
SPC	Statistical Process Control
SQM	Supplier Quality Management

3 Scope

This appendix serves to define the concept of PPQ elements used within the PPQ process. The required elements and the communication road will be defined in the PPQ kick off meeting between supplier and Siemens Energy.

4 Purpose

Product Process Qualification (PPQ) is a valuable tool for establishing confidence in suppliers and their production processes. In today's competitive manufacturing environment controlling cost and maintaining a high level of quality have become vital to a company's success. Therefore, it has become imperative to provide quality parts that meet the customer's requirements the first time and every time.


The PPQ process is not just a requirement from Siemens Energy to our suppliers.

You as Siemens Energy supplier benefit from the principles of the PPQ process, because it gives you the assurance that your process is ready and capable to meet all Siemens Energy requirements consistently throughout all future production runs, not just the first run.


5 What is PPQ?

A systematic method for qualifying a supplier's process to manufacture a specific part, and component part qualification.

Figure 1: PPQ Generic Process step

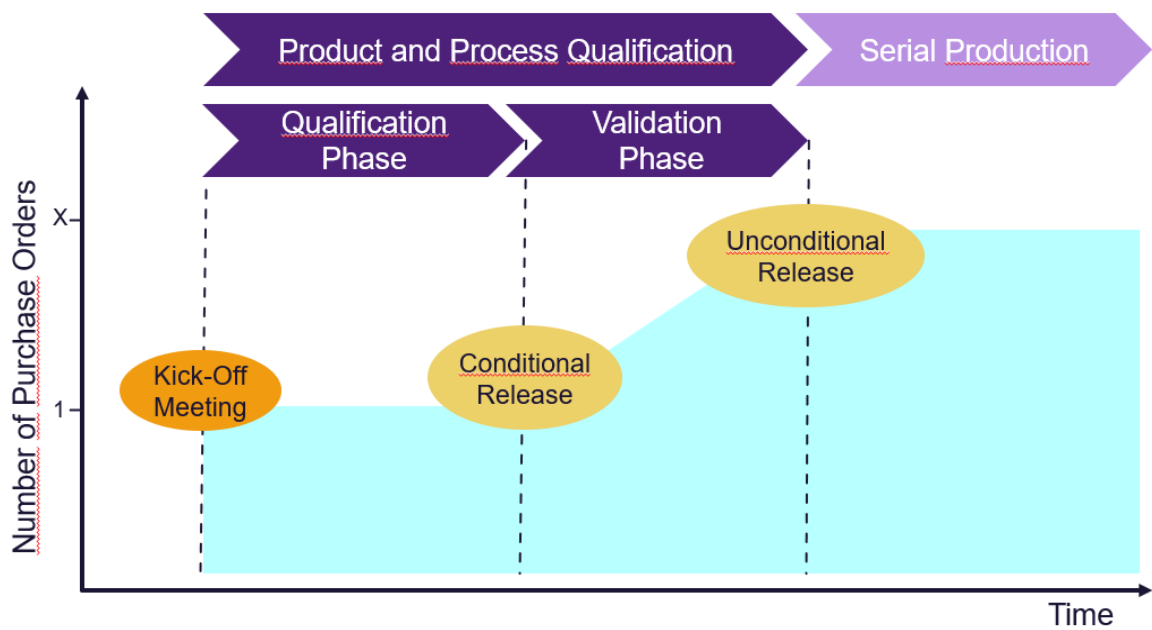

The PPQ process consists of following process steps, as shown in diagram:

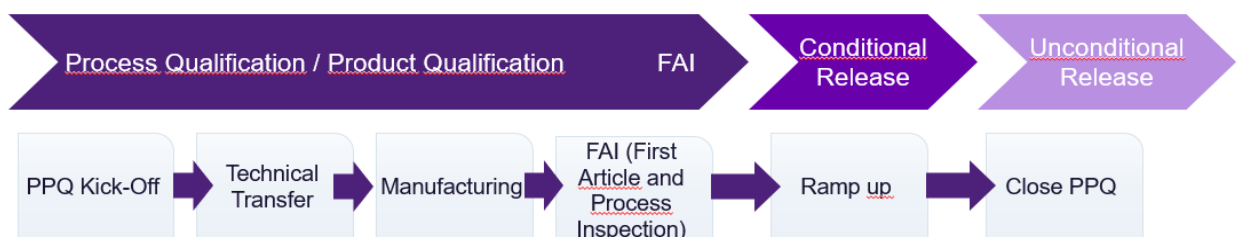

Division of Responsibility Matrix

Task / Responsibility		Siemens Energy PPQ Lead	Supplier
R = ... is Responsible for E = ... executes C = ... contributes I = ... must be informed about A = ... accepts			
Step	Activity	tasks for roles:	
1	Define PPQ team members (Siemens Energy + supplier)	R, E	R, E
2	Prepare/perform PPQ Kick-off Meeting	R, E	C
3	Develop detailed time schedule for PPQ	R, E	C
4	Track PPQ time schedule/milestones	R, E	C
5	Train supplier in all related tools	R	I
6	Check and release MQCP	R, E	C
7	Perform First Article Inspection (FAI)	R, A, E	C
9	Assign Conditional release in the related IT system	R, E	I
10	Define and track action items to reach unconditional approval of PPQ	R, E	C
11	Define Quality assurance measures for evaluation phase	R, E	I
12	Close PPQ action items	R, E	C
13	Inform supplier about PPQ decision	R, E	I

6 When to perform PPQ?

The PPQ Process is initiated as a result of any of the following:

- New supplier approved per the Supplier Qualification Process.
- Existing supplier expanding its scope of delivery, or qualification of new product.

- Existing supplier requiring full or partial product and/or process re-qualification. A requalification of a supplier’s product is necessary when at least one of the following criteria is met:

Criterion	Value
No purchase orders from Siemens Energy for the product / PPQ Group for ‘x’ months	TBD by the SQM manager on a case by case basis
Significant* Quality Issues, such as, but not limited to the following values	<ul style="list-style-type: none"> - CAPAs due to significant or recurring quality issues - High scrap rate - High deviation rate - High NCC rate - Deviations from frozen process - On Time Delivery rate - Violates Quality Target Agreement
Significant* change of technical supplier capability	Yes
Significant* change in manufacturing process or MQCP	Yes
New manufacturing site of the supplier	Yes
New scope split between supplier and sub-tier supplier	Yes

7 PPQ Elements

Applicable PPQ elements specific to the component/ project will be communicated to supplier in PPQ Kick Off meeting.

7.1 Element 1: Product Release

PPQ Element 1 is used to store:

- All information that defines the product to be produced by the supplier
- Confirmation by the supplier
- Potential technical deviations from the Siemens Energy product definition
- Manufacturing schedule of the supplier including hold and witness points
- Documentation from the PPQ Kick-off Meeting with the supplier
- Product release information
- Release/rejection criteria for the PPQ
- Un-priced copy of the purchase order

- Agreed suppliers demands of specifications or other clarifying documentations stated in the purchase order, such as:
 - Drawings (Siemens Energy)
 - Product specifications (Siemens Energy)
 - Procedures (product or project specific procedures from Siemens Energy)
 - Packing instructions (Siemens Energy)
 - Photos (when referenced to from Siemens Energy)
 - Final Check List (if applicable) Siemens Energy.
 - Quality Record Package (QRP) distribution list (if applicable). List who gets a copy of QRP every shipment, who gets SSR in receiving plant including telephone & fax numbers (Siemens Energy).
 - Documentation Plan (for large scope projects – what is due when and by whom) from Siemens Energy

7.2 Element 2: Supplier Drawings and Specifications

All customer, supplier and sub tier supplier issued drawings, procedures and specifications. A document list that states issue no and status.

This element is used to store

- all supplier created drawings and specifications that describe the final product or interim production steps,
- All destructive or non-destructive test procedures issued by the supplier,
- the reference between the drawing and the inspection records & data sheets, for instance by a balloon/ bubble drawing,
- in case no supplier drawings or spec's are created this PPQ element is to be filled with a supplier statement confirming that no supplier specific drawings/ spec's will be utilized throughout the production process.

Examples: List of all supplier and sub-tier supplier issued drawings and specifications including released product definition provided by supplier's engineering (in case of 3rd party design), a list of purchased catalogue items (pipes, helicoils etc.), balloon/ bubble drawing as reference between drawing and the inspection records & data sheets.

7.3 Element 3: Critical to Quality (CTQ) Characteristics

A CTQ is a dimension or characteristic 'critical' to the final customers. These dimensions or characteristics require continuous monitoring and reporting to Siemens Energy, as well as continuous improvement and process control programs throughout the life of the product to assure conformance to requirements.

Three sources need to define CTQs:

1. **Engineering** - which are the important dimensions, characteristics or material properties for the part/ set of parts in qualification,
2. **SQM/Supplier** - which process steps at the supplier need to be closely monitored and recorded to ensure the final part has the expected quality,
3. **Siemens Energy Manufacturing** - which dimensions, surface shapes etc. are important to ensure smooth final machining of the part/ set of parts.

The CTQs should be defined in a commodity-specific specification or can be provided in other controlled documents like drawings or part related specifications. In case no CTQs have been identified before the PPQ kick-off, the PPQ Team has to identify the needed CTQs for the upcoming PPQ.

The dimensions/ characteristics not specified as CTQs may still be important in their own way, but do not require the statistical study and continuous process improvement that goes along with marking a dimension or characteristic a CTQ.

Statistical data is required for each of these dimensions or features. The data needs to be continuous, that is, each part/ set of parts should be tracked in the sequence it enters a process with other parts. Additional part specific CTQs may be added at the start of the product process qualification (PPQ) process, during the qualification process, during re-qualification or at the request of a supplier process improvement team.

It is important to recognize that ALL dimensions and tolerances for the part must be met, whether they are marked as CTQs or not. Also, dimensions other than those indicated as CTQs may require measurement either for a time to prove capability, or because the vendor has decided they are important for internal control, or to help insure that CTQ dimensions are held.

A dimension or characteristic that is marked as a CTQ will require a continuous improvement program to try and make the distribution of parts/ set of parts closer and closer to nominal throughout the life of the program. Dimensions or characteristics not listed as CTQs may only require programs to bring the distribution of parts/ set of parts into tolerance and held there. These dimensions, that are not listed as CTQs, are also possible candidates for further engineering analysis to check, if tolerance relief is possible and cost reduction opportunities exist.

Final CTQs to be monitored during serial production will be agreed to at the end of the PPQ process (unconditional process approval) by the PPQ Team. The final CTQs for any part/set of parts will be defined on the commodity-specific specification or the engineering drawing. In the instances where specification is being applied to parts/sets of parts which have already undergone unconditional approval, it may be necessary to go back and re-establish process capability. This can be done over a few sets of some dimensions as if it were being qualified again, before returning to a sampling plan or waiving the inspection requirement.

Some CTQs may start out requiring 100% of the parts/set of parts but after proof of process capability the requirement may be reduced to a statistical sample. The point of

transfer from 100% to statistical sample rate if process and part specific. For each CTQ, actual results by serial or batch number for each feature are to be recorded. Detailed results and process capability of each feature are to be available for review and auditing.

ALL dimensions and tolerances for the part must be met, CTQs or not.

Dimensions other than those indicated as CTQs may require measurement, for capability.

These dimensions or characteristics require continuous 'real time' monitoring and reporting, as well as continuous improvement and process control programs throughout the life of the product to assure conformance to requirements.

In the event of a discovery MDR/NCR/FR, record traceability back to the shipment and production batch is required by the supplier.

These are very crucial features for the parts/ set of parts hence more care and attention needs to be given to these points. These need to be referenced in the MQCP and FMEA documents.

7.4 Element 4: Manufacturing Quality Control Plan (MQCP)

Manufacturing Quality Control Plan (MQCP) - Supplier must prepare and submit a MQCP. The MQCP must identify the production process the supplier will use to manufacture the product and should describe the key work elements and process controls that affect the quality characteristics. These include all, process control charts, process checks, process inspections, sampling inspection, quality audits, and outgoing inspection.

The MQCP must incorporate controls for the production process including Siemens Energy identified CTQs and identifying which control in the MQCP that determines the conformity to which CTQ.

Sampling plans – Sampling plans must be approved by Siemens Energy and the acceptance criteria must be a c=0 sampling plan. Sampling should be used to control a process, not used for acceptance of product. 100% inspection shall be used if process cpk is below 1.33.

The MQCP must minimally include the following:

- Supplier's name, part and process name, drawing- and sub number
- MQCP's issue date and last revision date
- PPQ number, prepared by and person responsible
- List all process steps used
- Identify name of the machines, jigs, fixtures, tools to be used for the product
- Identify name of the tools and inspection tools/gages used in the process
- Identify each characteristic how it is controlled and documented. (I.e. 100% inspection, go/no-go, X -R charts etc.) If sampling is utilized, also indicate sample size, frequency and acceptance criteria.

- Identify where in the process each CTQ are controlled with a reference number to each CTQ.
- Indicate inspection methods, frequencies and how it is documented for each controlled characteristic.
- Indicate action to take when a process or characteristic is out of control.
- Standard process procedures for blasting, painting, preservation, prep for shipment etc., as applicable.

SPC is required as a method for controlling CTQs during production. If it is agreed by Siemens Energy PPQ team that SPC is not possible or applicable in any instance, the supplier must show how to prove a stable and controlled process.

The MQCP must be reviewed and updated as appropriate whenever:

- The product has changed.
- The process is changed.
- The process becomes unstable.
- The process becomes not capable.

7.5 Element 5: Inspection Records and Data Sheets

This element is used to store result of the inspection documented by the filled out inspection records and data sheets.

Examples: Dimensional Inspection record template, completed dimensional inspection record data sheet, the filled out inspection records & data sheets, visual inspection results, witness reports.

A full dimensional layout inspection is to be provided for at least one part for all drawing requirements including drawing notes. The format of this layout inspection will include:

- A copy of the drawing, which is marked up with “bubble number”, references to the inspection report.
- An inspection report presented that lists all features, dimensions, drawing notes and boilerplate notes. For each of these items, a location reference listed to show the drawing page and grid location on the print from which the print characteristic was taken. These should match up one-for-one with the “bubble number” on the marked up drawing.

Inspection is to be performed using the production gages identified for use in the MQCP, unless otherwise approved by Siemens Energy.

Quality Control Inspection (QCI) records may be supplied as an alternate to a dimensional layout inspection if approved by Siemens Energy.

7.6 Element 6: Material Data

List all materials used in the scope of this product.

For material purchased, include copies of CofCs, final material test reports, metallurgical analysis reports, functional test reports etc.

This element is used to store all necessary material information for the related product to ensure appropriate, useful and approved material including:

- list all materials grades used in the scope of this product,
- list all material suppliers with their approval status relative to required supplier qualification noted within the material spec,
- copy of material substitution requests and approvals,
- results from Siemens Energy internal and external material testing, such as mechanical and metallurgical properties including microscopic and macroscopic pictures,
- function test reports, material test reports including mechanical, chemical, residual stress, heat stability test results, etc.
- for material purchased, include copies of CofCs, final material test reports, metallurgical analysis reports, functional test reports etc.

Examples: Used material list, mechanical test results, chemical test results, metallurgical pictures and samples (both: internal and external)

7.7 Element 7: Destructive & Non-Destructive Testing Records

This element shall include test reports for NDT methods as Penetrant Inspection (PT), Radiographic Inspection (RT or “X-ray”), Ultrasonic Testing (UT), Magnetic Particle Testing (MT) and others as applicable.

This element is used to store:

- Non-Destructive Examination/Testing (NDE or NDT) results including test reports for NDT methods such as Penetrant Inspection (PT), Radiographic Inspection (RT or “X-ray”), Ultrasonic testing (UT), Magnetic Particle Testing (MT) and others as applicable,
- Destructive testing, if applicable. This element will include test reports for destructive testing such as corrosion tests, vibration test etc.,
- When destructive testing is required, it may be allowable to use a scrapped part, when the scrapped part is representative of a production part using the same parameters and in the same manufacturing condition. (e.g. heat-treat, machining).

Examples: NDE Reports, Other test reports.

7.8 Element 8: Metals Joining Documents

This element is used to store all relevant documents defining and documenting the joining of metals including:

- Welding Performance Qualification (WPQ),
- Welding Procedure Spec (WPS),
- Procedure Qualification Record (PQR),
- Weld Map,
- Weld Joint Records (WJR),
- Weld Joint cards (WJC),
- Brazing information, drawings etc. (if any).

Examples: Weld Maps, Weld Joint Records (WJR), Weld Joint Cards (WJC), Welding Procedure Specifications (WPS), Welding Procedure Qualification Record (WPQR), Welding Performance Qualification (WPQ).

7.9 Element 9: Failure Modes & Effects Analysis (FMEA)

FMEA is used to identify process and design weaknesses and to aid the supplier in creating a more robust production process. Supplier shall include all steps of the production process as well as additional consideration of possible failure related handling, packaging and storage.

FMEA shall include all production steps/operations and utilize a cross-functional team from the supplier to ensure that potential failure modes and possible effects are analyzed.

The FMEA is to be a living document (i.e. not frozen at PPQ). It is to be updated throughout the lifecycle of the product/process when:

- Any process and design changes are made.
- New understanding of the process and design is gained.
- Non-conformance data becomes available (suppliers internal data, NCR, FR, MDRs, FDRs, SCARs etc.) which cover failures not already identified in the suppliers FMEA or if non-conformance rates are different than predicted in the FMEA.

The supplier is to provide Siemens Energy with updates to the FMEA at every revision, until full process approval is given.

The supplier shall use the RPN feature of the FMEA to determine when corrective action is required. The supplier should correct the process for RPNs of 150 or higher.

This element is used to document Failure Modes & Effects Analysis carried out by the supplier. FMEA is to be utilized as a tool to identify possible process and design weaknesses and to aid the supplier in creating a more robust production process.

7.10 Element 10: Process Capability

Supplier is responsible for performing statistical analysis of all Siemens Energy and supplier identified CTQ characteristics.

The intent of capability studies is to prove the supplier's process is capable of producing future parts within tolerance. The supplier will incorporate SPC into the MQCP to ensure that process capability is maintained/ improved.

The recommended software to perform process capability is MINITAB.

Initial approval will be withheld if the process cpk for a specific number of lots or parts is not ≥ 1.33 and process is determined to be statistically unstable. Process cpk may be calculated by industry accepted methods/software, but the basic formula for cpk is:

$$cpk = \frac{\bar{x} - LSL}{3s} \text{ - or - } cpk = \frac{USL - \bar{x}}{3s} \text{ (Whichever gives the lowest cpk)}$$

\bar{x} = process average

USL = Upper Specification Limit

s = process standard deviation

LSL = Lower Specification Limit

NOTE: Process capability studies are not always suitable as method. The method is mainly recommended for products produced in sets or lager series.

For parts produced in sets:

- Preliminary capability studies shall be provided at First Article Inspection "FAI" for whatever quantity was produced for FAI (e.g. 6 pieces).
- Full process capability studies measuring 100% of the parts shall be made available with each production set during the "conditional approval" state of process qualification.
- Trend data showing mean and standard deviation from set to set shall be provided as pilot run parts are produced during "conditional approval" production.
- PPQ team will specify number of parts required to prove process capability.

For parts not produced in sets:

It may not be able to perform process capability on FAI parts that are not produced in sets, due to insufficient data points for CTQ's. Then the PPQ team/lead define number of components to be produced to establish process capability.

Ongoing process control

This element is used to store necessary information regarding all identified CTQ characteristics. The supplier is responsible for performing statistical analysis of all Siemens Energy and supplier identified CTQ characteristics. These will be identified

via the print, specifications, or correspondence with Siemens Energy. Only Siemens Energy provided excel template should be used to document the analysis. The recommended software to perform process capability is MINITAB.

Examples: Minitab reports, Siemens Energy provided standardized Excel spreadsheet.

7.11 Element 11: Gage Repeatability & Reproducibility (Gage R&R)

The intent of Gage R&R is to provide evidence that the inspection measurement system being utilized is appropriate. Wrong measurement system used, may result in a high Gage R&R result and add additional variations to the process.

Gage R&R studies shall be performed by accepted methods. The Gage R&R is to be stated in terms of percent of tolerance.

$$\frac{P}{T} = \frac{5,15 \times \frac{R}{d_2}}{\text{Tolerance}} \quad T=\text{total tolerance i.e. } \pm 0.2 = 0.4$$

Recommended software is MINITAB. In MINITAB, use the “crossed” method for non-destructive inspection and the “nested” method for destructive inspection.

When possible samples for a Gage R&R are not to be randomly selected. They are to be selected so that the samples span the tolerance range. In MINITAB, for a Gage R&R to be statistically valid, it should have at least 5 “distinct categories”. Select the proper combination of samples, operators and repetitions to achieve this. A rule of thumb would be to have (# of samples) x (# of operators) x (# of repetitions).

For gauging methods that involve computer controlled inspection, i.e. CMM, a Gage R&R will still be performed to ensure that the programming is correct and that fixturing and re-fixturing do not add excessive sources of variation.

Acceptance criteria for Gage R&R is stated in terms of % Gage R&R.

- A Gage %R&R below 10% is considered acceptable.
- A Gage %R&R between 10% and 30% is questionable and must be approved by the Siemens Energy PPQ team. Acceptance in this range should only be considered when no cost-effective method of improving the R&R is available.
- A Gage %R&R >30% is unacceptable and the inspection measurement system must be improved to reduce the %R&R to an acceptable level.
- The %R&R is calculated two ways and both methods are valuable. The two methods for %R&R are “percent of variation” and “percent of tolerance”. The percentage of variation is the preferred method, however, if process capability is low (below 1.0 cpk) and 100% inspection is being utilized to contain defects,

then a high %R&R of tolerance means the Gage is likely not adequate for 100% inspection even if %R&R of variation is acceptable.

- If an inspection process with a high Gage R&R will be used in production, the supplier must add additional controls to the process. They must indicate how they will avoid false acceptance of parts near the edge of the tolerance caused by Gage inaccuracy. E.g. will they have a tightened tolerance as control limits and an additional method of verification will verify parts beyond the control limits by multiple inspectors.

For attribute Gages, e.g. Go/No-Go Gages, Gage R&R studies should be performed if attribute gages are used for final product acceptance. Gage R&R for in process measurement may be waived at the discretion of the Siemens Energy PPQ team.

Supplier's calibration procedures should include a provision for repeating Gage R&Rs on a regular frequency to ensure that tooling/Gage wear is not affecting the ongoing gage R&R.

All practical sources of variation are to be considered. For example:

- If inspection fixtures are involved, parts must be completely removed from fixture and the fixture reset between readings during the Gage R&R study.
- If it is typical to calibrate the particular Gage before use, then the Gage must be recalibrated between every reading during the Gage R&R study.
- If parts will be inspected on multiple shifts during production, then the study must include readings taken during all such shifts during the study. This is to help take into account changes in ambient temperatures and humidity as well as off-shift personnel that may affect R&R.

This element is used to store Gage R&R results. The intent of Gage R&R is to provide evidence that the inspection measurement system being utilized on the CTQ is appropriate. If the wrong inspection measurement system is used, a high Gage R&R may result, which may add additional and preventable variation to the process.

Examples: Minitab reports, appropriate excel spreadsheets.

7.12 Element 12: Tools & Gages

Product specific jig/fixture inspection tooling reports for tooling that is needed to assure process control (with list of tool ID#s and calibration traceability information.)

List of thread Go/No-Go Gages applicable to the product (Product specific tools)

List of Siemens Energy owned tooling/Gages

- If Siemens Energy has paid for tooling, gages or equipment a list shall be included in the PPQ of those Siemens Energy owned items.

- If Siemens Energy drawings were used to produce the property, then the drawing number and revision will also be listed. If non- Siemens Energy drawings were used, then copies of the drawings must be uploaded to the database.
- Identity no, localization, photo and maintenance routines of the equipment/tools needs to be documented in the PPQ.

This element is used to store all relevant information regarding used tools and gages for the material or product including:

- list of all supplier owned and Siemens Energy owned tools, gages, jigs, fixtures that will be used on the parts / set of parts,
- serial number, tool id and picture of the tools and gages,
- calibration schedule for gages and procedure for calibration process (in-house or outsourced),
- jig/ fixture/ machine inspection reports,
- list of thread gauges size / Go/No-Go Gauges that will be used,
- list of functional gauges or sweep gauges that will be used.

Examples: List of tools and gages including serial number, tool id and picture, calibration schedule and procedure, related inspection records.

7.13 Element 13: Discrepancy Reports and Engineering Changes

Material Disposition Reports (MDRs) are used in the North American region for reporting material discrepancies.

List of NCRs (hereinafter also meaning FM/MDRs) All NCRs must be closed before unconditional approval is granted. NCRs are to be included in this list whether initiated by supplier or Siemens Energy (even if the disposition is “accept as is”).

This element is used to store all discrepancy records for this product or material and its manufacturing process including:

- engineering change requests (ECR) that affect the PPQ parts in qualification,
- list of manufacturing deviations (MDRs/NCRs, SAP, Q-notification) with closure dates (all manufacturing deviations must be closed before unconditional approval is granted).

Examples: List of all ECRs (Engineering Change Request) with rev #., copy of all closed MDRs/NCRs, Change or Revised Engineering Release (ER), Re-Issuing

(OneP), SAP Q-notifications for this product including pictures and datasheets that describe deviations as well, highlight all issues in a spreadsheet and what can be done to prevent them next time.

7.14 Element 14: Packaging Instructions and Photos

The supplier must prepare work instructions that explain how the parts will be packed. These instructions along with photos showing the product in its packaging shall be included in this element.

If returnable packaging is used, supplier must explain how packaging material will be controlled.

Siemens Energy provides packing instructions for some parts and these instructions overrides any issues of supplier approved packing instructions.

This element is used to store instructions that explain how the parts/ set of parts will be packaged and photos showing the product in its packaging. The supplier must prepare these work instructions and provide appropriate photos. If returnable packaging is used, supplier must explain how packaging material will be controlled.

Examples: Photos showing how the part / set of parts will be preserved and packaged for shipment, packing and shipping procedure and photo of the part / set of parts markings including what was marked on the part/ set of parts and where it was marked.

7.15 Element 15: Special Process Documentation

This element would include such things as special lab certifications the supplier may have or other special processes or certifications.

A process whose results cannot be fully verified through subsequent nondestructive inspection and testing of the product and where processing deficiencies may become apparent only after the product is in use.

Examples: Thermal spraying, Laser Cutting and other similar special process qualification records. Additional ISO Management system certifications, in case Post Welding Heat Treatment and Heat treat charts are not included in the MQCP but provided by the supplier and tables showing ramp up, hold and cooling time and temperature, Hardening.

7.16 Element 16: Correspondence and Miscellaneous Documents

This element is used to store all relevant correspondence and misc. regarding the PPQ like e-mails, letter etc. that directly apply to the PPQ. These may be clarifications

of PPQ requirements or notices of who will be involved on the PPQ review team Only those items that directly apply and have significance to the PPQ should be included.

Examples: PPQ Kick-Off Meeting Minutes, Copy of important emails related to this product, process or qualification, any other documents or emails needed such as written temporary substitution information etc., any formal letters or correspondences received from Siemens Energy, main meeting minutes.

7.17 Element 17: Personnel & Suppliers

List of supplier's key personnel (Top management, Manufacturing, QA, welders and all personnel that need certificates of knowledge to be able to perform their work)

NDE personnel and process approval letters shall be included for methods used, and personnel that were used, or are planned to be used if required by Siemens Energy.

List of approved sub-contractors that need certificates of knowledge to be able to perform their work or run production. (Sub-suppliers, see Element 4 and 6)

Communication team, a matrix showing the communication team (consisting of personnel from both Siemens Energy and the supplier)

Stating: Name, function, phone no and e-mail address.

This element is used to store information on suppliers' key personnel, sub-tier supplier contacts and Siemens Energy employees which are involved in the PPQ process.

- List of certified NDE and welding personnel including their certificates,
- List of key supplier's personnel,
- List of sub-tier supplier.

Examples:

PPQ Communication Matrix,

List of certified NDE and welding personnel including their certificates, list of key supplier's personnel (Top management, Manufacturing, QA, welders, Machinists) involved with the part / set of parts, copy of supplier's organization chart, list of approved sub-contractors (Sub-suppliers) where the supplier will be buying parts / set of parts, materials etc. for our Siemens Energy product (e.g. helicoil, pipes, flanges, plates etc.) including what each sub-tier supplier provides to the supplier, their name, contact and location, list of outsourced services (calibration, NDE, Heat Treatment, welding etc.), who does it and where they are located together with their contact information.

7.18 Element 18: First Article Inspection (FAI)

First Article Inspection is defined as the inspection of the “first” parts produced using the proposed production process. This is performed at the supplier’s location.

The FAI is a complete, independent, and documented physical and functional inspection process to verify that prescribed production methods have produced an acceptable item as specified by:

- engineering drawings
- quality specifications
- PDS
- planning
- purchase order
- engineering specifications
- other applicable design documents.

This element is used to store:

- the result of the First Article Inspection and the related report,
- related meeting minutes,
- the result of the Siemens Energy Incoming Inspection
- related part / set of parts certificates.

Examples: Results of testing (e.g. mechanical, NDE, dimensional) performed by Siemens Energy, FAI report (FAIR), documentation of incoming inspection, part / set of parts certificates. Post-manufacturing inspections (performed after all production steps and inspections for the first article).

7.19 Element C#: Custom Elements

If needed, additional custom elements may be added to the record. If a unique category is necessary, they may be added starting with element number C#.

General Information

If you have further detailed questions about the PPQ process, please contact your responsible buyer or the nominated PPQ team leader.

How to find the document:

Siemens Energy Supplier Portal (Download Center):

<https://www.siemens-energy.com/global/en/company/about/supply-chain-management/supplier-cockpit.html>

Siemens Energy internal reference:

Appendix 6 to procedure 008-01350